salzer

PRICE LIST
APRIL 2026



BUILDING
ELECTRICALS

Modular Switches | Wires & Cables | MCB's & DB's









Profile

Since 1985

Salzer Electronics Limited was established in 1985 in technical collaboration with German Industrial Switchgear manufacturing company. Today Salzer has emerged as a Leading Electrical Installation Product Manufacturer. Salzer has been at the forefront of technological advancements catering to almost all aspects of the Indoor & Outdoor Electrical requirements of the Building & Construction Industry, Industrial & Automobile component segments.

Engineering Excellence

Manufacturing infrastructure facilities duly supported by modern like TQM, TPM, Six Sigma. Lean Manufacturing & 6-S. Multi-barrier quality checks to ensure that the entire product range conforms to stringent quality parameters. Continuous up gradation at all levels by the implementation and maintenance of Total Quality Management.

Quality certifications such as CB, CE, UL, CSA, S Mark on applicable range of products. Dedication to continuous product development through Innovation and setting new benchmarks. A full-fledged R&D centre that is recognized by the Department of Scientific & Industrial Research Government of India. Self sufficient and a captive Tool Room, Sophisticated in-house type testing laboratory with test capacity up to 400 Amps as per various IS & IEC standards.

Our Vision is to be a Global Electrical Solutions Company, most admired for its People, Performance and Values.'



Highlights

- Market Leader in Rotary Switches business with 30% market share and largest in Asia.
- Largest producer of Cable Ducts (Wiring Channels) in Asia.
- Among the first few to comply the RoHS Directive for Environmental Friendliness.
- First in Asia to obtain CB certification for Rotary & LB Switches.
- A full fledged R&D Center recognised by dept. of scientific & industrial research Govt. of India.
- Technical Collaboration with TrafoModern - Austria for Manufacturing Dry Type Transformers.
- Technical Tie up with Metallux AG - Germany for Manufacture of Hall effect Sensors.
- More than 25% of the production are exported.
- Salzer is the only approved supplier for Nuclear Power Corporation for Rotary Switches.
- Largest Supplier to Indian Railways.







POWER TO CONTROL

Wires for life

Salzer Wires and Cables division an ISO 9001 & IATF certified company established in the year 2006 manufactures a wide range of Domestic & Industrial Wires & Cables for various applications. Salzer has a state of the art Hi tech manufacturing setup with German machinery to produce superior quality wires and a full fledged laboratory for testing wires complying to stringent quality benchmarks as per ISI, UL, BS & IEC standards. Salzer wires and cables are accepted for its quality and durability worldwide.

- 99.9% pure ETP grade copper
- Flame Retardant
- FR-LSH
- Uniform & twin insulation for safety
- 100 % Bunching
- Better flexibility for easy wiring
- High ageing property
- Low Resistance





Flame Retardant Wires - FR

[PVC Insulated Single Core with Multi strand Bright Annealed Bare Copper Conductor
Voltage Grade: 1100V Conforming to IS:694

HSN Code : 85446090

		FR 90 Mts		FR 180 Mts	
Sq/mm	Current Rating	Code	STD.Pack	Code	STD.Pack
0.75	7	SHR0007PXA0	20	-	-
1	12	SHR0010PXA0	16	SFR0010PXAJ	8
1.5	16	SHR0015PXA0	10	SFR0015PXAJ	6
2.5	22	SHR0025PXA0	8	SFR0025PXAJ	4
4	29	SHR0040PXA0	5	SHR0040PXAJ	3
6	37	SHR0060PXA	4	SHR0060PXAJ	2
10	51	SHR0100PXA0	1	SHR0100PXAJ	1
16	68	SHR0160PXA0	1	SHR0160PXAJ	1

Replace X with colour code : A-Red | B-Yellow | C-Blue I D-Green I E-Black I F-Grey I T-White



Flame Retardant Low smoke and Halogen FR-LSH

[PVC Insulated Single Core with Multi strand Bright Annealed Bare Copper Conductor
Voltage Grade: 1100V Conforming to IS:694

HSN Code : 85446090

		FR 90 Mts		FR 180 Mts	
Sq/mm	Current Rating	Code	STD.Pack	Code	STD.Pack
1	12	SHR00I0SXA0	16	SHR0010SXAJ	8
1.5	16	SHR00I5SXA0	10	SHR0015SXAJ	6
2.5	22	SHR0025SXA0	8	SHR0025SXAJ	4
4	29	SHR0040SXA0	5	SHR0040SXAJ	3
6	37	SHR0060SXA0	4	SHR0060SXAJ	2
10	51	SHR0100SXA0	1	SHR0100SXAJ	1
16	68	SHR0160SXA0	1	SHR0160SXAJ	1



Halogen Free Flame Retardant (HFFR) Cables

Single Core Halogen Free Flame Retardant Type Unsheathed cable with Flexible Conductor
Voltage Grade: 1100V Conforming to IS: 17048

HSN Code : 85446090

HFFR Halogen Free Flame Retardant Cables - Single Core 100 Mts			
Sq/mm	Current Rating	Code	STD.Pack
0.50	4	SZR0005PXA0	20
0.75	7	SZR0007PXA0	20
1	12	SZR0010PXA0	16
1.5	16	SZR0015PXA0	10
2.5	22	SZR0025PXA0	8
4	29	SZR0040PXA0	5
6	37	SZR0060PXA0	4
10	51	SZR0100PXA0	1
16	68	SZR0160PXA0	1

Replace X with colour code : A-Red | B-Yellow | C-Blue I D-Green I E-Black I F-Grey I T-White

Orders will be accepted only in multiples of standard packing

[PVC Insulated Single Core with Multi strand Bright Annealed Bare Copper Conductor
Voltage Grade: 1100V Conforming to IS:694

Flexible Cables: Single Core

HSN Code : 85446090

100 Mtrs


Sq/mm	As per IS : 3961 Current Rating	Construction No.of strands/Dia in mm	Code	Standard Packaging/Nos.
0.5	4	16/0.20	SFR0005PXA0	24
0.75	7	24/0.20	SFR0007PXA0	24
1	12	32/0.20	SFR0010PXA0	16
1.5	16	30/0.25	SFR0015PXA0	10
2.5	22	50/0.30	SFR0025PXA0	8
4	29	56/0.30	SFR0040PXA0	5
6	37	84/0.30	SFR0060PXA0	4
10	51	80/0.40	SFR0100PXA0	1
16	68	126/0.40	SFR0160PXA0	1
25	86	196/0.40	SFR0250PXA0	1
35	110	276/0.40	SFR0350PXA0	1
50	145	396/0.40	SFR0500PXA0	1
70	215	354/0.50	SFR0700PXA0	1
95	260	424/0.50	SFR0950PXA0	1
120	305	608/0.50	SFR1200PXA0	1
150	355	750/0.50	SFR1500PXA0	1
185	415	925/0.50	SFR1850PXA0	1




Replace X with colour code : A-Red | B-Yellow | C-Blue I D-Green I E-Black I F-Grey I T-White



Two Core



Three Core



Four Core

Flexible Cables

HSN Code : 85446090

Sq/mm	As per IS: 3961 Current Rating	Constrction No.of strands/Dia in mm	Code 2 Core	3 Core	4 Core
0.50	4	16/0.2	SFR0005PXB0	SFR0005PXC0	SFR0005PXD0
0.75	7	24/0.2	SFR0007PXB0	SFR0007PXC0	SFR0007PXD0
1	12	32/0.2	SFR0010PXB0	SFR0010PXC0	SFR0010PXD0
1.5	16	30/0.25	SFR0015PXB0	SFR0015PXC0	SFR0015PXD0
2.5	22	50/0.25	SFR0025PXB0	SFR0025PXC0	SFR0025PXD0
4	29	56/0.25	SFR0040PXB0	SFR0040PXC0	SFR0040PXD0
6	37	84/0.3	SFR0060PXB0	SFR0060PXC0	SFR0060PXD0
10	51	80/0.4	SFR0100PXB0	SFR0100PXC0	SFR0100PXD0
16	68	126/0.4	-	SFR0160PXC0	SFR0160PXD0

Replace X with colour code : E-Black I F-Grey



LAN CABLES

HSN Code : 85444999

Salzer LAN Cable facility is a ISO 9001 certified company with Hi-Tech manufacturing setup and sophisticated German machinery ensuring consistent Quality and highly durable wires. Features : Versatile HDPE Insulation - (Solid, Skin-Foam-Skin) • Insulation Physical foam technology and Max foaming 60% • High accuracy Lay Length and Low Noise level • Compliant with IEC 11 801, EN 50173 and ANSI standards • Automatic LF/HF measuring system for Horizontal cables.

Category	Description	Std. Pack/ Packaging Type	Ordering Code
Cat 5e - 24 AWG	Solid Cable 4 pair UTP Cat 5e	305 Mtrs in Tangle Free Coil	5E 24UTP BL A
		305 Mtrs in Reel-in-Box	5E 24UTP BL B
		100 Mtrs in Coil	5E 24UTP BL C
Cat 6 - 24 AWG	Solid Cable 4 pair UTP Cat 6	305 Mtrs in Tangle Free Coil	S6 24UTP BL A
		305 Mtrs in Reel-in-Box	S6 24UTP BL B
		100 Mtrs in Coil	S6 24UTP BL C
Cat 6 - 23 AWG	Solid Cable 4 pair UTP Cat 6	305 Mtrs in Tangle Free Coil	S6 23UTP BL A
		305 Mtrs in Reel-in-Box	S6 23UTP BL B
		100 Mtrs in Coil	S6 23UTP BL C





* 500 Mtrs/ 1000 Mtrs Rolls can also be supplied

* Shielded & Aluminum Foiled Cables available on request. Std. Outer Sheathing Colour is Blue other colours can also be supplied MOQ 3000 Mtrs

Data Cables



CCTV Cables



Salzer CCTV Cables are highly durable and provide high performance Hybrid Data transfer of Electrical and Communication signals from Camera to CCTV Surveillance equipment's Securely & Seamlessly. Our Cables are made of Flame Retardant PVC with Pure ETP Grade Copper wire , Aluminum foil Mylar, Aluminum Alloy Braiding and are RoHS compliant. Ideal for Domestic & Industrial CCTV Surveillance systems.



Solid Bare Copper
ETP Grade Pure copper
Solid HDPE Insulation
Aluminum Foil
Al. Alloy Braiding (60% coverage)
CO-Axial - Outer Sheath (PVC)
PVC Insulation
Overall - Outer Sheath (PVC)

* Outer Sheath can also be offered in Grey replace WH with GY

3+1 CCTV Cable — HSN Code : 85446090



90 Mtrs	180 Mtrs
Code: CCTV3X1WHG	Code: CCTV3X1WHH

4+1 CCTV Cable



90 Mtrs	180 Mtrs
Code: CCTV4X1WHG	Code: CCTV4X1WHH


Photographs shown are only for illustrative purpose

Certifications

SWITCHES: IS 3854

MCB: IS 60898

WIRES: IS:694

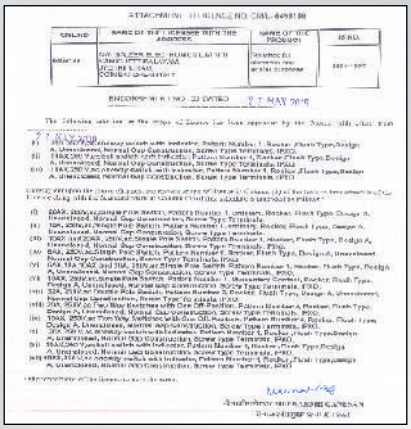

ATTACHMENT TO LICENCE NO. CML - 6724173


CML/NO	NAME OF THE LICENSEE WITH THE FACTORY ADDRESS	NAME OF THE PRODUCT	INDIAN STANDARD NO.
6724173	M/s. SALZER ELECTRONICS LIMITED, UNIT IV, SF.NO.66/3, IRUTTATHAPURAM, KARAMADAI POST, COIMBATORE 641104.	Polyvinyl Chloride Insulated Unsheathed and Sheathed Cables/Cords with Rigid and Flexible Conductor for Rated voltages upto and including 1100 V	IS 694:2010

ENDORSEMENT NO. 22 DATED 25 JUL 2019

Wherein, the licence was valid up to Thirty-First July Two Thousand and Nineteen.

Now, consequent upon renewal, the validity of the licence given in endorsement No.18 has been extended from First August Two Thousand and Nineteen to Thirty First July Two Thousand and Twenty.

Other terms and conditions of Licence remain the same.

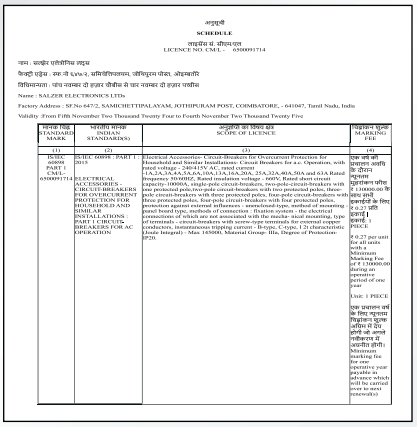

SCHEDULE

LICENCE NO. CML - 6500091714

Name : SALZER ELECTRONICS LTD.

Factory Address : SF.No 647/2, SAMICHETTIPALAYAM, JOTHIPURAM POST, COIMBATORE, - 641047, Tamil Nadu, India

Validity :From Fifth November Two Thousand Twenty Four to Fourth November Two Thousand Twenty Five

भारतीय मानक STANDARD MARK	भारतीय मानक INDIAN STANDARD(S)	अनुज्ञप्ति का विषय क्षेत्र SCOPE OF LICENCE	चिह्नांकन मुहर MARKING FEE
(1)	(2)	(3)	(4)
ISI(C) 60898 PART 1 : 2019 AMD01714	IS/IEC 60898 : PART 1 : 2019	Electrical Accessories- Circuit-Breakers for Overcurrent Protection for Household and Similar Installations- Circuit Breakers for a.c. Operation, with rated voltage < 2400 V AC, rated current ... 6A,10A,16A,20A,25A,32A,40A,50A and 63A Rated frequency: 50/60HZ, Rated insulation voltage : 440V, Rated short circuit capacity -10000A, single-pole circuit-breakers, two-pole-circuit-breakers with one protected pole, three-pole circuit-breakers with three protected poles, four-pole circuit-breakers with three protected poles, four-pole circuit-breakers with four protected poles, four-pole circuit-breakers with four protected poles protection against external influences - enerclosed-type; method of mounting - panel board type; methods of connection - fixation system - the electrical connection of which is by means of screw-type terminals, pillar-type terminals of terminals - circuit-breakers with screw-type terminals for external copper conductors, instantaneous tripping current - B-type, C-type, I 2t characteristic (Joule Integral) - Max. 150000, Material Group- IIIa, Degree of Protection - IP20.	एक वर्ष की अवधि अथवा उसके के दौरान भुगतान मुहरांकन फीस ₹ 11000.00 के लिए ₹ 0.27 प्रति इकाई। इकाई : PIECE ₹ 0.27 per unit for all units with a Minimum Marking Fee of ₹ 11000.00 during an operative period of one year. Unit: 1 PIECE एक प्रचालन वर्ष के लिए भुगतान किया जाने वाला न्यूनतम चिह्नांकन शुल्क अग्रिम में देय होगी जो अगले नवीकरण से अग्रदेय होगी। Minimum Marking Fee for one operative year payable in advance which will be due next renewal(s)

For Latest certificates please write to us at sales3@salzergroup.com



ISO

9001 QMS



ISO

14001 EMS



OHSAS

18001

www.salzergroup.com

BUILDING
ELECTRICALS

Guarantee

The company undertakes to replace or repair at its discretion products should they become defective solely as a result of any manufacturing defects for

a) Mechanical Modules - Switches & Sockets, Bulb Holders in White 10 years
b) Electronic products - Fan Regulators, Dimmers, USB Socket, Communication Sockets (Computer, Telephone, TV, Audio / Video) Modular MCB's, RCCB, ACCL, Speciality products, DB Boxes & LED Indicator Switches upto 1 year
c) Coated Products - Decorative Colour Plates, Glass Plates, Switches Sockets & accessories with Surface coating 1 year
d) MCB & Isolator upto 3 years
The guarantee will be valid only if installation procedures / maintenance is carried out by qualified professional electrician, The Guarantee stands nullified if the product is tampered, dismantled or altered or if the original mounting boxes have not been used in conjunction with the accessories. The guarantee does not extend to cover consequential loss or damage or installation cost arising from the defective product. Replacement shall be carried out with design of the products prevailing at that point of time. Product development is a continuous process & hense the data / prices given are subject to change without prior notice. Disputes if any are subject to Coimbatore jurisdiction only.

This price list supercedes all earlier ones.



salzer

SALZER ELECTRONICS LIMITED

Samichettipalayam, Coimbatore - 641 047, India
Ph: +91 422 4233600 Email: sales3@salzergroup.com

Customer Care
Ph: +91 422 4233636 Email: service@salzergroup.com
For Product Enquiries **1800 1030 161**